

## 产品概述

DL


LG

DL LG


180°

( DL LG )

## 性能范围

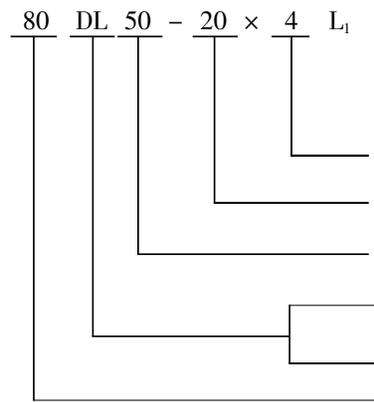

## 型号意义

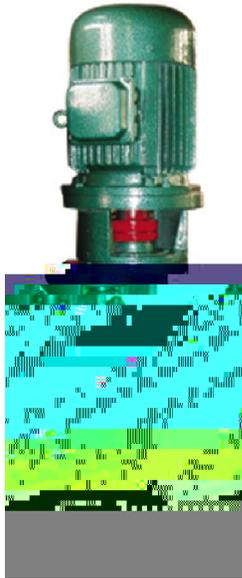

DL



LG

## 主要用途

DL LG

DL LG  
150°C

80°C DLR

105°C

# DL、LG

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)	Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)									
		(m³/h)	(L/s)								(m³/h)	(L/s)														
25LG3-10	2	2.4	0.67	20.8	38	2900	0.75	2.0	40LG12-15	5	9	2.50	80	55	2900	5.5	2.2	2.9	4.3							
		3.0	0.83	20	42						12	3.33	75	60												
		4.7	1.31	15.4	44						18	5.00	60	63												
	3	2.4	0.67	31.2	38		1.1	2.0			6	9	2.50	96						55	5.5	2.2	2.9	4.3		
		3.0	0.83	30	42							12	3.33	90						60						
		4.7	1.31	23.1	44					18		5.00	72	63												
	4	2.4	0.67	41.6	38		1.5	2.0		7		9	2.50	112		55	7.5	2.2	2.9	4.3						
		3.0	0.83	40	42							12	3.33	105		60										
		4.7	1.31	30.8	44						18	5.00	84	63												
	5	2.4	0.67	52	38		1.5	2.0			8	9	2.50	128		55					7.5	2.2	2.9	4.3		
		3.0	0.83	50	42							12	3.33	120		60										
		4.7	1.31	38.5	44					18		5.00	96	63												
	6	2.4	0.67	62.4	38		2.2	2.0		50LG24-20		2	18	5.00		44	67	2950	5.5	2.85					3.15	3.40
		3.0	0.83	60	42								24	6.67		40	69									
		4.7	1.31	46.2	44						30		8.33	33		64										
7	2.4	0.67	72.8	38	2.2	2.0	3	18	5.00		66	67	7.5	2.85	3.15	3.40										
	3.0	0.83	70	42				24	6.67		60	69														
	4.7	1.31	53.9	44				30	8.33		49.5	64														
8	2.4	0.67	83.2	38	2.2	2.0		4	18		5.00	88					67		11	2.85	3.15	3.40				
	3.0	0.83	80	42					24		6.67	80					69									
	4.7	1.31	61.6	44			30		8.33		66	64														
9	2.4	0.67	93.6	38	2.2	2.0	5		18		5.00	110	67	11	2.85	3.15	3.40									
	3.0	0.83	90	42					24		6.67	100	69													
	4.7	1.31	69.3	44				30	8.33		82.5	64														
10	2.4	0.67	104	38	3.0	2.0		6	18		5.00	132	67						15	2.85	3.15	3.40				
	3.0	0.83	100	42					24		6.67	120	69													
	4.7	1.31	77	44			30		8.33		99	64														
11	2.4	0.67	114.4	38	3.0	2.0	65LG36-20		2	27	7.5	45.5	70	2950	7.5	2.6	3.4	4.2								
	3.0	0.83	110	42						36	10.00	40	72.5													
	4.7	1.31	84.7	44				43.2		12.00	34	67														
12	2.4	0.67	124.8	38	4.0	2.0		3	27	7.5	68.25	70	11		2.6	3.4	4.2									
	3.0	0.83	120	42					36	10.00	60	72.5														
	4.7	1.31	92.4	44					43.2	12.00	51	67														
13	2.4	0.67	135.2	38	4.0	2.0			4	27	7.5	91						70	15	2.6	3.4	4.2				
	3.0	0.83	130	42						36	10.00	80						72.5								
	4.7	1.31	100.1	44				43.2		12.00	68	67														
14	2.4	0.67	145.6	38	4.0	2.0		5		27	7.5	113.75	70		18.5	2.6	3.4	4.2								
	3.0	0.83	140	42						36	10.00	100	72.5													
	4.7	1.31	107.8	44					43.2	12.00	85	67														
15	2.4	0.67	156	38	4.0	2.0			6	27	7.5	136.5	70						22	2.6	3.4	4.2				
	3.0	0.83	150	42						36	10.00	120	72.5													
	4.7	1.31	115.5	44				43.2		12.00	102	67														
32LG6.5-15	2	4.5	1.25	32.6	47	2900	1.5	2.0		80LG50-20	2	40	11.11	43.6	70	2950	11	3.1					3.8	5.3		
		6.5	1.81	30	53							50	13.89	40	75											
		9.5	2.64	23	50				68.4			19.00	31.7	70												
	3	4.5	1.25	48.9	47		2.2	2.0	3		40	11.11	65.4	70	15		3.1	3.8	5.3							
		6.5	1.81	45	53						50	13.89	60	75												
		9.5	2.64	34.6	50						68.4	19.00	47.5	70												
	4	4.5	1.25	65.2	47		3	2.0			4	40	11.11	87.2						70	18.5	3.1	3.8	5.3		
		6.5	1.81	60	53							50	13.89	80						75						
9.5		2.64	46	50	68.4	19.00			63.4			70														
5	4.5	1.25	81.5	47	4	2.0	5	40	11.11			109	70	22	3.1		3.8	5.3								
	6.5	1.81	75	53				50	13.89			100	75													
	9.5	2.64	57.5	50				68.4	19.00		79.25	70														
6	4.5	1.25	97.8	47	4	2.0		6	40		11.11	130.8	70						30	3.1	3.8	5.3				
	6.5	1.81	90	53					50		13.89	120	75													
	9.5	2.64	69	50			68.4		19.00		95.1	70														
7	4.5	1.25	114.1	47	5.5	2.0	40LG12-15		2	9	2.50	32	55	2900	2.2	2.9	4.3									
	6.5	1.81	105	53						12	3.33	30	60													
	9.5	2.64	80.5	50				18		5.00	24	63														
8	4.5	1.25	130.4	47	5.5	2.0		3	9	2.50	48	55	3		2.2	2.9	4.3									
	6.5	1.81	120	53					12	3.33	45	60														
	9.5	2.64	92	50					18	5.00	36	63														
40LG12-15	2	9	2.50	32	55	2.2		2.2	2.9	4	9	2.50	64		55	4	2.2	2.9	4.3							
		12	3.33	30	60						12	3.33	60		63											
		18	5.00	24	63						18	5.00	48		63											

# DL、LG

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)	Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH)r (m)			
		(m³/h)	(L/s)								(m³/h)	(L/s)								
40DL8-10	2	6.4	1.78	20.7	44	1450	1.5	1.5	50DL15-12	2	10	2.78	26	55	1450	3	1.8			
		8.0	2.22	20.0	48						15	4.17	24	60				2.0		
		10.0	2.78	18.7	51						22	6.11	18	55				2.5		
	3	6.4	1.78	31.0	44		2.2	1.5		2.0	3	10	15	2.78		39	55	4	1.8	
		8.0	2.22	30.0	48								15	4.17		36	60			2.0
		10.0	2.78	28	51								22	6.11		27	55			2.5
	4	6.4	1.78	41.3	44		3.0	1.5		2.0	4	10	22	2.78		52	55	5.5	1.8	
		8.0	2.22	40.0	48								15	4.17		48	60			2.0
		10.0	2.78	37.3	51								22	6.11		36	55			2.5
	5	6.4	1.78	51.7	44		3.0	1.5		2.0	5	10	22	2.78		65	55	5.5	1.8	
		8.0	2.22	50.0	48								15	4.17		60	60			2.0
		10.0	2.78	46.7	51								22	6.11		45	55			2.5
6	6.4	1.78	62.0	44	4.0	1.5	2.0	6	10	22	2.78	78	55	7.5	1.8					
	8.0	2.22	60.0	48						15	4.17	72	60			2.0				
	10.0	2.78	56.0	51						22	6.11	54	55			2.5				
7	6.4	1.78	72.3	44	5.5	1.5	2.0	7	10	22	2.78	91	55	7.5	1.8					
	8.0	2.22	70.3	48						15	4.17	84	60			2.0				
	10.0	2.78	65.3	51						22	6.11	63	55			2.5				
8	6.4	1.78	82.7	44	5.5	1.5	2.0	8	10	22	2.78	104	55	11	1.8					
	8.0	2.22	80.0	48						15	4.17	96	60			2.0				
	10.0	2.78	74.7	51						22	6.11	72	55			2.5				
9	6.4	1.78	93.0	44	5.5	1.5	2.0	9	10	22	2.78	117	55	11	1.8					
	8.0	2.22	90	48						15	4.17	108	60			2.0				
	10.0	2.78	84.0	51						22	6.11	81	55			2.5				
10	6.4	1.78	103.3	44	7.5	1.5	2.0	10	10	22	2.78	130	55	11	1.8					
	8.0	2.22	100.0	48						15	4.17	120	60			2.0				
	10.0	2.78	93.3	51						22	6.11	90	55			2.5				
11	6.4	1.78	113.7	44	7.5	1.5	2.0	11	10	22	2.78	143	55	11	1.8					
	8.0	2.22	110	48						15	4.17	132	60			2.0				
	10.0	2.78	102.6	51						22	6.11	99	55			2.5				
12	6.4	1.78	124	44	7.5	1.5	2.0	12	22	32	6.11	32	55	5.5	4.8					
	8.0	2.22	120	48						32	8.89	30	60			5.5				
	10.0	2.78	111.9	51						42	11.67	24	55			6.5				
50DL12-12	2	9	2.50	25	50	1450	2.2	1.8	65DL32-15	3	22	6.11	48	55	7.5	4.8				
		12.6	3.50	24.4	54						32	8.89	45	60			5.5			
		18	5.00	20.4	55						42	11.67	36	55			6.5			
	3	9	2.50	37.5	50		3	1.8		2.0	4	22	32	6.11	64	55	11	4.8		
		12.6	3.50	36.6	54								32	8.89	60	60			5.5	
		18	5.00	30.6	55								42	11.67	48	55			6.5	
	4	9	2.50	50	50		4	1.8		2.0	5	22	32	6.11	80	55	15	4.8		
		12.6	3.50	48.8	54								32	8.89	75	60			5.5	
		18	5.00	40.8	55								42	11.67	60	55			6.5	
	5	9	2.50	62.5	50		5.5	1.8		2.0	6	22	32	6.11	96	55	15	4.8		
		12.6	3.50	61	54								32	8.89	90	60			5.5	
18		5.00	51	55	42	11.67			72				55	6.5						
6	9	2.50	75	50	5.5	1.8	2.0	7	22	32	6.11	112	55	18.5	4.8					
	12.6	3.50	73.2	54						32	8.89	105	60			5.5				
	18	5.00	61.2	55						42	11.67	84	55			6.5				
7	9	2.50	87.5	50	7.5	1.8	2.0	8	22	32	6.11	128	55	22	4.8					
	12.6	3.50	85.4	54						32	8.89	120	60			5.5				
	18	5.00	71.4	55						42	11.67	96	55			6.5				
8	9	2.50	100	50	7.5	1.8	2.0	9	22	32	6.11	144	60	22	4.8					
	12.6	3.50	97.6	54						32	8.89	135	65			5.5				
	18	5.00	81.6	55						42	11.67	108	60			6.5				
9	9	2.50	112.5	50	11	1.8	2.0	10	22	32	6.11	160	60	30	4.8					
	12.6	3.50	109.8	54						32	8.89	150	65			5.5				
	18	5.00	91.8	55						42	11.67	120	60			6.5				
10	9	2.50	125	50	11	1.8	2.0	11	22	32	6.11	176	60	30	4.8					
	12.6	3.50	122	54						32	8.89	165	65			5.5				
	18	5.00	102	55						42	11.67	132	60			6.5				
11	9	2.50	137.5	50	11	1.8	2.0	12	22	32	6.11	192	60	30	4.8					
	12.6	3.50	134.2	54						32	8.89	180	65			5.5				
	18	5.00	112.2	55						42	11.67	144	60			6.5				

# DL、LG

Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH) <sub>r</sub> (m)	Model	Stage	Capacity		Head (m)	Eff (%)	Speed (r/min)	Power (kW)	(NPSH) <sub>r</sub> (m)
		(m³/h)	(L/s)								(m³/h)	(L/s)					
80DL50-20	2	32	8.89	43	64	1480	11	2.0	150DL160-25	2	120	33.33	53	72	1480	37	3.1
		50	13.89	40	70			50			76	3.5					
		73	20.28	32	65			44			73	3.8					
	3	32	8.89	64.5	64		15	2.0		3	120	33.33	80	72		55	3.1
		50	13.89	60	70			75			76	3.5					
		73	20.28	48	65			66			73	3.8					
	4	32	8.89	86	64		22	2.0		4	120	33.33	106	72		75	3.1
50		13.89	80	70	100	76		3.5									
73		20.28	64	65	88	73		3.8									
5	32	8.89	107.5	64	30	2.0	5	120	33.33	133	72	90	3.1				
	50	13.89	100	70		125		76	3.5								
	73	20.28	80	65		110		73	3.8								
6	32	8.89	129	64	30	2.0	6	120	33.33	159	72	110	3.1				
	50	13.89	120	70		150		76	3.5								
	73	20.28	96	65		132		73	3.8								
7	32	8.89	150.5	64	37	2.0	7	120	33.33	186	72	132	3.1				
	50	13.89	140	70		175		76	3.5								
	73	20.28	112	65		154		73	3.8								
8	32	8.89	172	64	45	2.0	8	120	33.33	212	72	132	3.1				
	50	13.89	160	70		200		76	3.5								
	73	20.28	128	65		176		73	3.8								
100DL72-20	2	50.4	14	46	62	1480	15	2.5	150DL155-30	2	100	27.8	65	64	1480	45	3.2
		72	20	40	72			43			60	75	3.9				
	86.4	24	36	71	55		75	4.8									
	3	50.4	14	69	62		18.5	2.5		3	100	27.8	97.5	64		75	3.2
		72	20	60	72			43			90	75	3.9				
	86.4	24	54	71	3.5		51.4	82.5		75	4.8						
	4	50.4	14	92	62		30	2.5		4	100	27.8	130	64		90	3.2
		72	20	80	72			43			120	75	3.9				
	86.4	24	72	71	3.5		51.4	110		75	4.8						
	5	50.4	14	115	62		37	2.5		5	100	27.8	162.5	64		110	3.2
72		20	100	72	43	150		75	3.9								
86.4	24	90	71	3.5	51.4	137.5	75	4.8									
6	50.4	14	138	62	37	2.5	6	100	27.8	195	64	132	3.2				
	72	20	120	72		43		180	75	3.9							
86.4	24	108	71	3.5	51.4	165	75	4.8									
7	50.4	14	157	62	45	2.5	7	100	27.8	227.5	64	160	3.2				
	72	20	140	72		43		210	75	3.9							
86.4	24	126	71	3.5	51.4	192.5	75	4.8									
8	50.4	14	184	62	55	2.5	8	100	27.8	260	64	200	3.2				
	72	20	160	72		43		240	75	3.9							
86.4	24	144	71	3.5	51.4	220	75	4.8									
9	50.4	14	207	62	55	2.5	9	100	27.8	292.5	64	200	3.2				
	72	20	180	72		43		270	75	3.9							
86.4	24	162	71	3.5	51.4	247.5	75	4.8									
10	50.4	14	230	62	75	2.5	10	100	27.8	325	64	220	3.2				
	72	20	200	72		43		300	75	3.9							
86.4	24	180	71	3.5	51.4	275	75	4.8									
100DL100-20	2	60	16.67	48	67	1480	18.5	2.5	200DL280-43	2	185	51.4	94	69	1450	110	3.0
		100	27.78	40	72			77			77	4.7					
		120	33.33	34	65			75			75	6.0					
	3	60	16.67	72	67		30	2.5		3	185	51.4	141	69		160	3.0
		100	27.78	60	72			77			77	4.7					
		120	33.33	51	65			75			75	6.0					
	4	60	16.67	96	67		37	2.5		4	185	51.4	188	69		220	3.0
		100	27.78	80	72			77			77	4.7					
120		33.33	68	65	75	75		6.0									
5	60	16.67	120	67	45	2.5	5	185	51.4	235	69	280	3.0				
	100	27.78	100	72		77		77	4.7								
	120	33.33	85	65		75		75	6.0								
6	60	16.67	144	67	55	2.5	6	185	51.4	282	69	315	3.0				
	100	27.78	120	72		77		77	4.7								
	120	33.33	102	65		75		75	6.0								
7	60	16.67	168	67	75	2.5	7	185	51.4	330	69	315	3.0				
	100	27.78	140	72		77		77	4.7								
	120	33.33	119	65		75		75	6.0								
8	60	16.67	192	67	75	2.5	8	185	51.4	380	69	315	3.0				
	100	27.78	160	72		77		77	4.7								
	120	33.33	136	65		75		75	6.0								